



FCC TEST REPORT

FCC PART 15 B MEASUREMENT AND TEST REPORT

For

Shenzhen Qipengmaoye Electronics Co., Ltd

Building 10, XiangYuEr Industrial Park, Longsheng Road, Longgang, Shenzhen, China

Series model:

LG series(QP-R8LG/QP-LG-8VR/QP-R10LG/QP-R12LG/QP-R14LG/QP-R16LG/
QP-R18LG/QP-R20LG/QP-R22LG/QP-R24LG/QP-R28LG/QP-R30LG)

2021-03-29

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Charging case
Test Engineer:	Fan Yang/ <i>Fan Yang</i>
Report Number:	TH2103126-C06-R01
Test Date:	2021-03-19 to 2021-03-29
Reviewed By:	Prince Huang/ <i>Prince Huang</i>
Approved By:	Prince Huang/ <i>Prince Huang</i>
Prepared By:	Shenzhen Tian Hai Test Technology Co.,Ltd. 4F, A3 BLDG, The Silicon Valley Power intelligent terminal industrial park, Guanlan street, Longhua district, Shenzhen Tel: +86-755-86615100 Fax: +86-755-86615105

Note: This test report is limited to the above client company and the product model only.

It may not be duplicated without prior written consent of Shenzhen Tian Hai Test Technology Co.,Ltd.



TABLE OF CONTENTS

1 - GENERAL INFORMATION.....3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... 3

1.2 SUMMARY OF TEST RESULT..... 3

1.3 TEST METHODOLOGY..... 4

1.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS..... 4

1.5 FEATURES OF EUT: PLEASE REFER TO USER MANUAL OR PRODUCT SPECIFICATION..... 4

2 - INSTRUMENT AND CALIBRATION.....5

2.1 MEASURING INSTRUMENT CALIBRATION..... 5

2.2 TEST AND MEASUREMENT EQUIPMENT..... 5

2.3 TEST PERFORMED..... 5

2.4 APPENDIX..... 6

3 - CONDUCTED EMISSION MEASUREMENT..... 8

3.1 TEST SET-UP..... 8

3.2 LIMIT..... 8

3.3 TEST PROCEDURE..... 8

3.4 TEST SPECIFICATION..... 9

3.5 RESULT: PASS..... 9

3.6 TEST DATA:..... 9

4 - RADIATED EMISSION MEASUREMENT.....10

4.1 TEST SETUP..... 10

4.2 LIMIT..... 11

4.3 TEST PROCEDURE..... 11

4.4 TEST SPECIFICATION..... 11

4.5 RESULT: PASS..... 11

4.6 TEST DATA:..... 11

5 - MEASUREMENT UNCERTAINTY..... 12

APPENDIX 1..... 14

APPENDIX 2 - PHOTOS OF EUT..... 18

APPENDIX 3 - TEST PHOTOS.....21



1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **Shenzhen Qipengmaoye Electronics Co., Ltd**

Address: Building 10, XiangYuEr Industrial Park, Longsheng Road, Longgang, Shenzhen, China

Manufacturer: **Shenzhen Qipengmaoye Electronics Co., Ltd**

Address: Building 10, XiangYuEr Industrial Park, Longsheng Road, Longgang, Shenzhen, China

General Description of E.U.T

EUT Description: **Charging case**

Trade mark: /

Model: LG series(QP-R8LG/QP-LG-8VR/QP-R10LG/QP-R12LG/QP-R14LG/QP-R16LG/
QP-R18LG/QP-R20LG/QP-R22LG/QP-R24LG/QP-R28LG/QP-R30LG)

Rating: Input:AC 220-240V,47-63Hz,1.06A max;
Output:DC 5V,2A*14 USB ports.

Note: All tests are based on model QP-R30LG.

Remark: * The test data gathered are from the production sample provided by the manufacturer.

1.2 SUMMARY OF TEST RESULT

Emission		
Test Standard	Test Item	Test Result
FCC Part 15B Class B	Conducted Emission	Pass
FCC Part 15B Class B	Radiated Emission	Pass



1.3 TEST METHODOLOGY

EUT SYSTEM OPERATION

1. The EUT was configured according to ANSI C63.4 – 2014 Section 5.2, 7.1, 7.2 & FCC PART 15.
2. Perform the EMC testing procedures, and measure the maximum emission noise.

1.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

Setup Diagram

See test photographs attached in appendix I for the actual connections between EUT and support equipment.

Support Equipment

Peripherals Devices:

No.	Instrument	Manufacturer	Model No.	S/N	Next Cal. Date	Calculator due date

Note: All the above equipment /cable were placed in worse case position to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer’s requirement and conditions for the intended use.

1.5 FEATURES OF EUT: PLEASE REFER TO USER MANUAL OR PRODUCT SPECIFICATION.



2 - INSTRUMENT AND CALIBRATION

2.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

2.2 TEST AND MEASUREMENT EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy.

Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

TABLE LIST OF TEST AND MEASUREMENT EQUIPMENT

No.	Instrument	Manufacturer	Model No.	S/N	Next Cal. Date	Calculator due date
Conduction	Receiver	R&S	ESHS10	830223/008	2021-3-12	2022-3-11
	Spectrum Analyzer	ADVANTEST	R3261C	87120343	2021-3-12	2022-3-11
	RF Cable	MIYAZAKI & Anritsu	RG58A0 & MP59B	M79094	2021-3-12	2022-3-11
	L.I.S.Ne	Rolf Heine Hochfrequenztechnik	NNB-2/16z	98062	2021-3-12	2022-3-11
	EMI Test Receiver	R&S	EAHS-10	1093.4495.03	2021-3-12	2022-3-11
	Click Analyzer	Schaffner	DIA1512C	5218	2021-3-12	2022-3-11
Radiation	Spectrum Analyzer	Nex1	CC-C-1F	MF7802113	N/A	N/A
	Antenna	Schwarzbeck	VULB 9161	4077	2021-3-12	2022-3-11
	RF Cable	N/A	N/A	N/A	2021-3-12	2022-3-11
	Pre-Amp	Schaffner	CPA-9232	1012	2021-3-12	2022-3-11

2.3 TEST PERFORMED

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver which bandwidth is set at 9 KHz.

Radiated emissions were investigated over the frequency range from 30 MHz to 1000 MHz using a receiver which bandwidth is set at 120 KHz. Radiated measurement was performed at distance that from an antenna to EUT is 10 meters.



2.4 APPENDIX

Appendix A: Measurement Procedure for Main Power Port Conducted Emissions

The measurements are performed in a WH lab room; The EUT was placed on non-conductive 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded. Power to the EUT was provided through the LISN which has the Impedance (50 ohm/50 uH) vs. Frequency Characteristic in accordance with the standard.

Powers to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40 cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, hot and neutral, was measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

Appendix B: Test Procedure for Radiated Emissions Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360. The antenna height is 1m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.



Measurements on the Open Site or Chamber

The radiated emissions test will then be repeated on the open site or chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipments are set up on the turntable. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120 KHz bandwidth. For frequency between 30 MHz and 1000 MHz, the reading is recorded with peak detector or quasi-peak detector.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

Appendix C: Warning Labels

Label Requirements

A Class B digital device subject to certification by the FCC shall carry a warning label which includes the following statement:

*** * * W A R N I N G * * ***

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Appendix D: Warning Statement Statement Requirements

The operator's manual for a Class A digital device shall contain the following statements or their equivalent:

*** * * W A R N I N G * * ***

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equivalent.

*** * * * * * * * ***


If the EUT was tested with special shielded cables the operator's manual for such product shall also contain the following statements or their equivalent:

Shielded interface cables and/or AC power cord, if any, must be used in order to comply with the emission limits.



3 - CONDUCTED EMISSION MEASUREMENT

3.1 TEST SET-UP

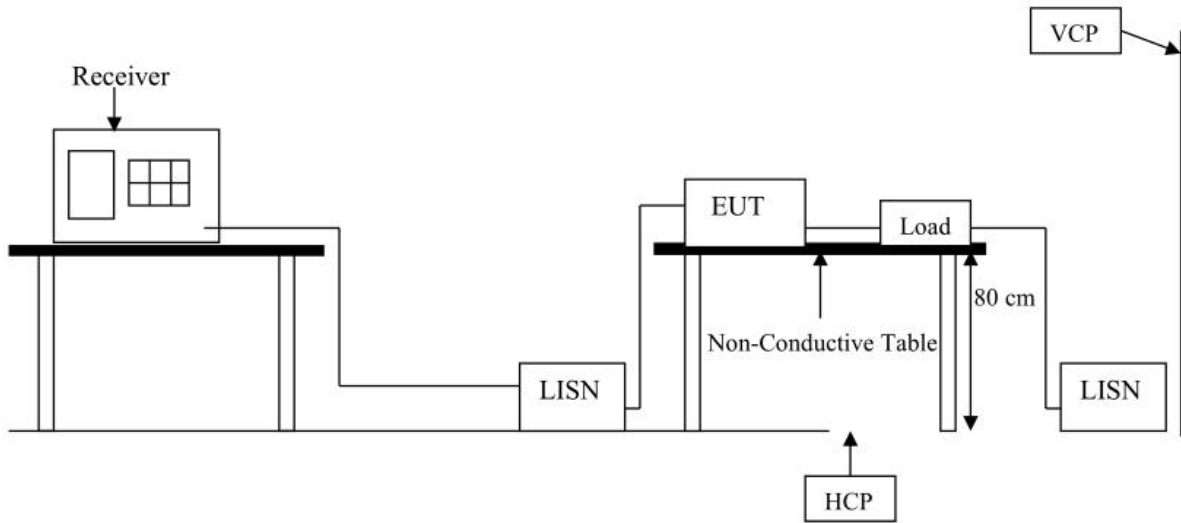

3.2 LIMIT

Frequency Range (MHz)	CLASS A		CLASS B	
	QP dB(uV)	Average dB(uV)	QP dB(uV)	Average dB(uV)
0.15-0.5	79 dBuV	66 dBuV	66 - 56 dBuV	56 - 46 dBuV
0.5-5.0	73 dBuV	60 dBuV	56 dBuV	46-66 dBuV
5.0-30.0	73 dBuV	60 dBuV	60 dBuV	50 dBuV

Remark: In the above table, the tighter limit applies at the band edges.

3.3 TEST PROCEDURE

The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). It provides a 50 ohm / 50 uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm / 50 uH coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photograph.)

Both sides of AC line are checked for the maximum conducted emission interference. In order to find the maximum emissions, the relating positions of equipment and all of the interference cables must be changed according to FCC PART 15 regulation: The measurement procedure on conducted emission interference.



The resolution bandwidth of the field strength meter is set at 9KHz

3.4 TEST SPECIFICATION

ANSI C63.4 – 2014 Section 5.2, 7.1, 7.2 & FCC PART 15 CLASS B

3.5 RESULT: PASS


3.6 TEST DATA:

Please refer to appendix 1.



4 - RADIATED EMISSION MEASUREMENT

4.1 TEST SETUP

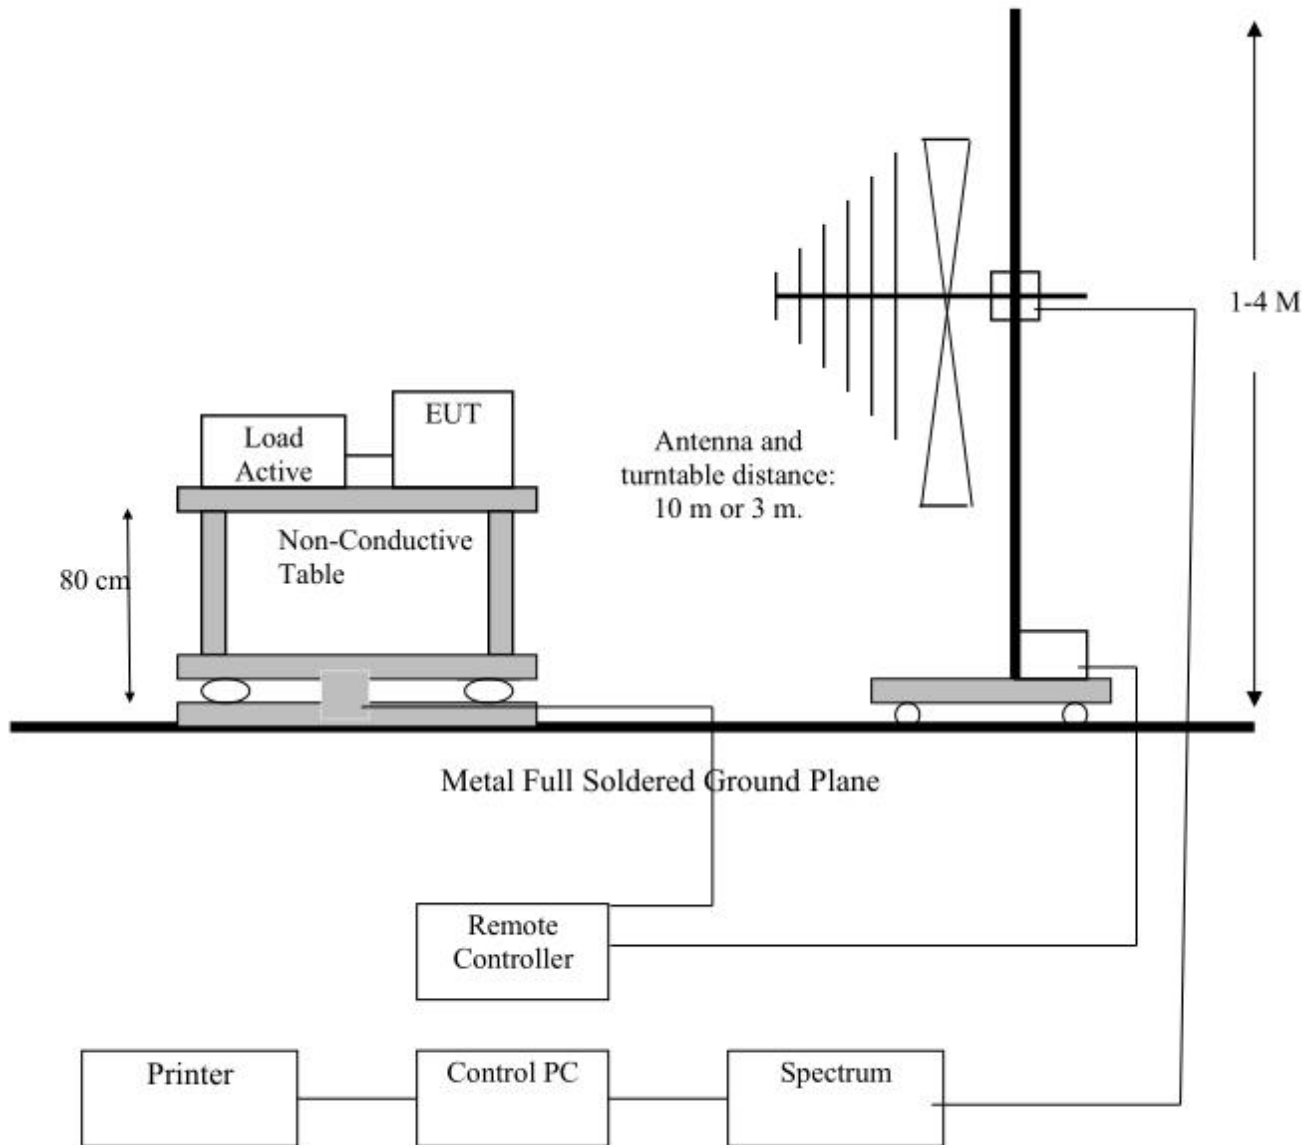



4.2 LIMIT

Frequency Range (MHz)	CLASS A		CLASS B	
	Distance (Meter)	Limit dBuV/m	Distance (Meter)	Limit dBuV/m
30 ~ 230	10	40	10	30
230 ~ 1000	10	47	10	37

Frequency range (MHz)	Average limit dB(uV/m)	Peak limit dB(uV/m)
Above 1000	54	74

Remark: In the above table, the tighter limit applies at the band edges

4.3 TEST PROCEDURE

The EUT and its simulators are placed on turn table, non-conductive and wooden table, which is 0.8 meter above ground. The turn table rotates 360 degrees to determine the position of the maximum emission level. For the frequency range is below 1 GHz, the EUT was positioned such that distance from antenna to the EUT is 10 meters. For the frequency range is above 1 GHz, the EUT was positioned such that distance from antenna to the EUT is 3 meters.

For the frequency range is below 1 GHz, the antenna is moved up and down between 1 meter and 4 meters to receive the maximum emission level.

Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission, all of the interference cables must be manipulated according to FCC regulation; the test procedure of the radiated emission measurement.

The bandwidth set on the field strength is 120 KHz when the frequency range is below 1GHz. The bandwidth set on the field strength is 1 MHz when the frequency range is above 1GHz.

4.4 TEST SPECIFICATION

ANSI C63.4 – 2014 Section 5.2, 7.1, 7.2 & FCC PART 15 CLASS B

4.5 RESULT: PASS

4.6 TEST DATA:

Please refer to appendix 1.



5 - MEASUREMENT UNCERTAINTY


Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30. MHz	LINE/NEUTRAL	1.78 dB
Radiated Emission	30 MHz ~ 1,000 MHz	Horizontal	3.59 dB
	1,000 MHz ~ 18GHz	Vertical	3.89 dB
	1,000 MHz ~ 18GHz	Horizontal	5.00 dB
	1,000 MHz ~ 18GHz	Vertical	4.64 dB



SAMPLE OF FCC VERIFICATION LABEL 1

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1)
This device may not cause harmful interference. And
(2)
this device must accept any interference received,
including interference that may cause undesired
operation.

SAMPLE OF FCC DoC LABEL 2

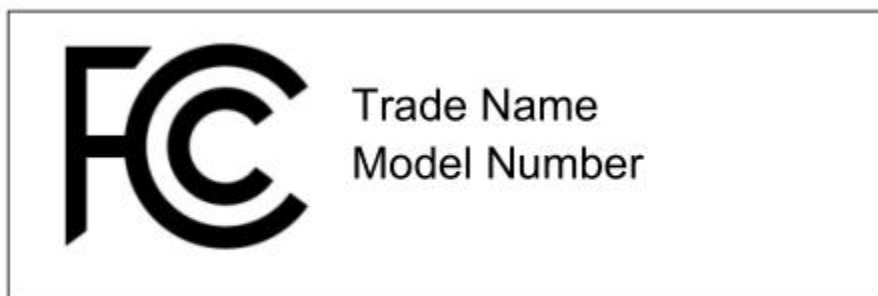




APPENDIX 1

Test Data – Conducted Emission

Comment: Live Line

120.0 dBuV

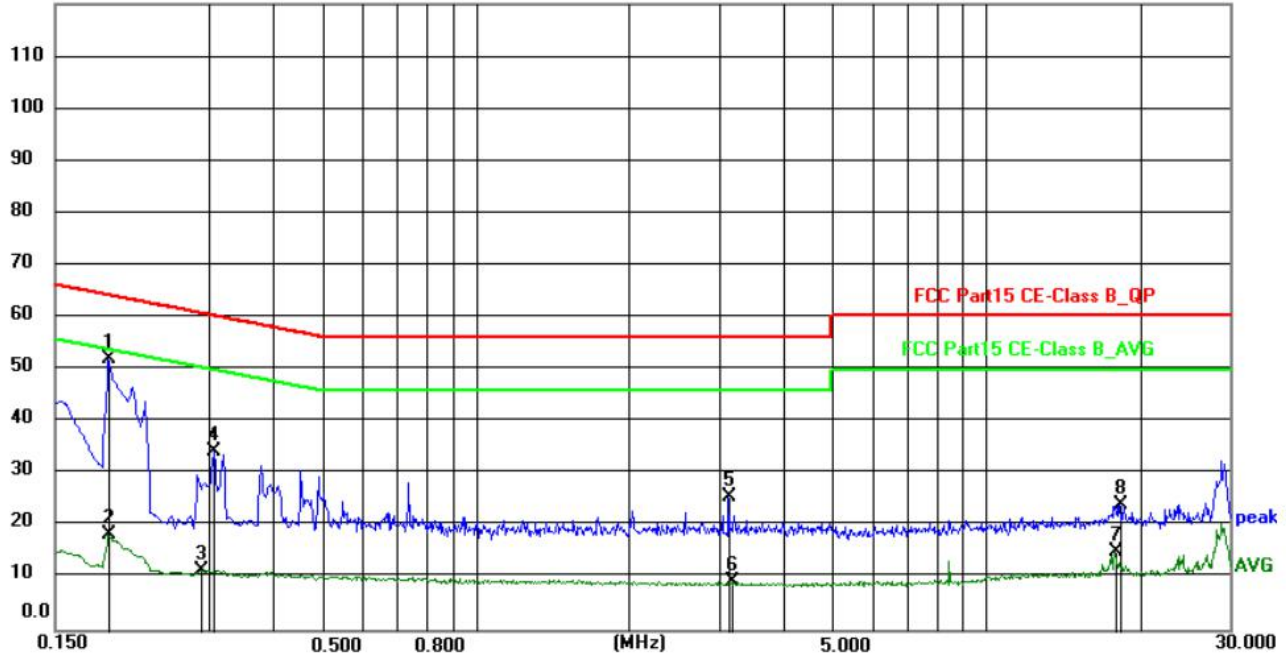


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1904	41.82	10.13	51.95	64.02	12.07	peak	P
2	0.1904	8.26	10.13	18.39	54.02	35.63	AVG	P
3	0.2893	1.44	10.14	11.58	50.54	38.96	AVG	P
4	0.3067	24.11	10.14	34.25	60.06	25.81	peak	P
5	3.1231	15.30	10.25	25.55	56.00	30.45	peak	P
6	3.1900	-0.88	10.26	9.38	46.00	36.62	AVG	P
7	17.8493	4.54	10.47	15.01	50.00	34.99	AVG	P
8	18.2316	13.55	10.48	24.03	60.00	35.97	peak	P



Test Data – Conducted Emission

Comment: Neutral Line

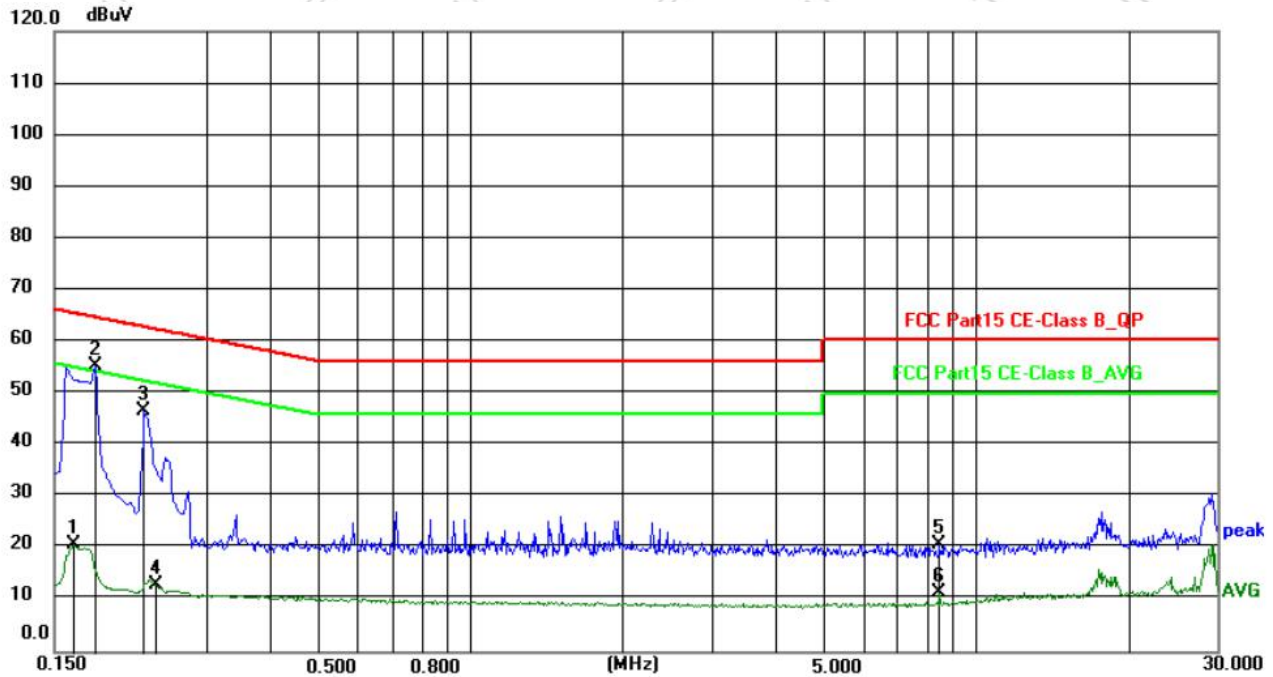


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1635	10.62	10.16	20.78	55.28	34.50	AVG	P
2 *	0.1815	45.09	10.15	55.24	64.42	9.18	peak	P
3	0.2265	36.36	10.16	46.52	62.58	16.06	peak	P
4	0.2378	2.86	10.16	13.02	52.17	39.15	AVG	P
5	8.4795	10.49	10.38	20.87	60.00	39.13	peak	P
6	8.4795	1.23	10.38	11.61	50.00	38.39	AVG	P



Test Data – Radiated Emission

Polarization: Horizontal

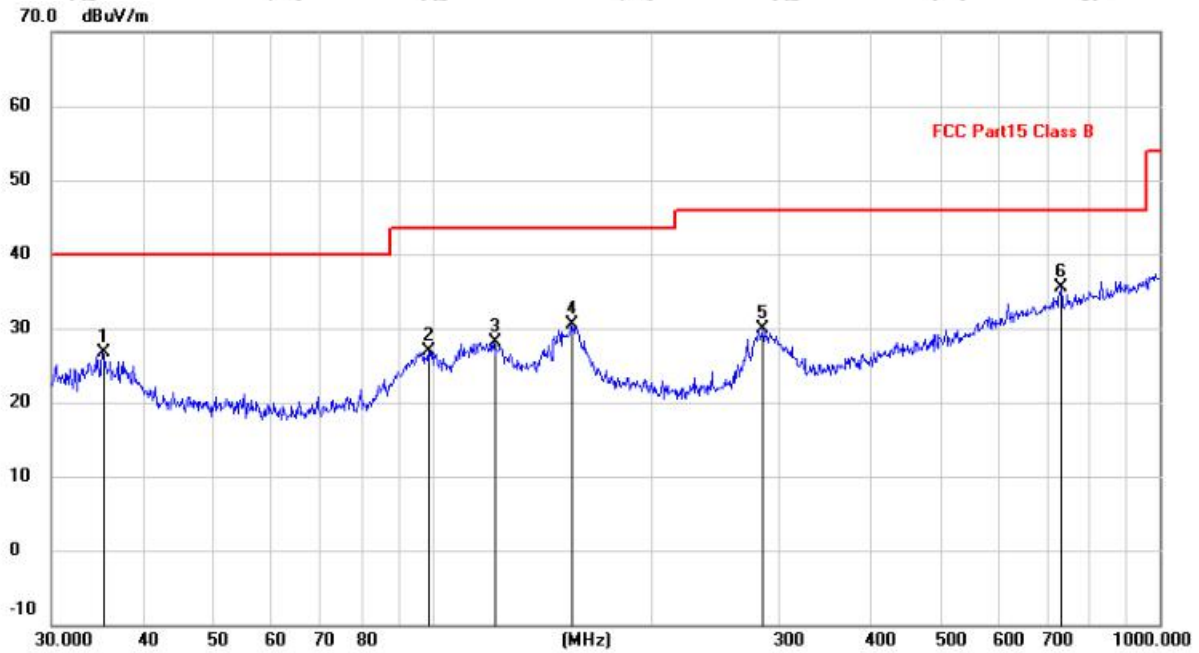


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		35.2512	3.46	23.25	26.71	40.00	-13.29	peak			
2		98.8326	6.32	20.55	26.87	43.50	-16.63	peak			
3		121.5486	5.44	22.74	28.18	43.50	-15.32	peak			
4		155.3644	7.29	23.24	30.53	43.50	-12.97	peak			
5		284.9767	6.58	23.42	30.00	46.00	-16.00	peak			
6	*	731.9203	2.21	33.24	35.45	46.00	-10.55	peak			



Test Data – Radiated Emission

Polarization: Vertical

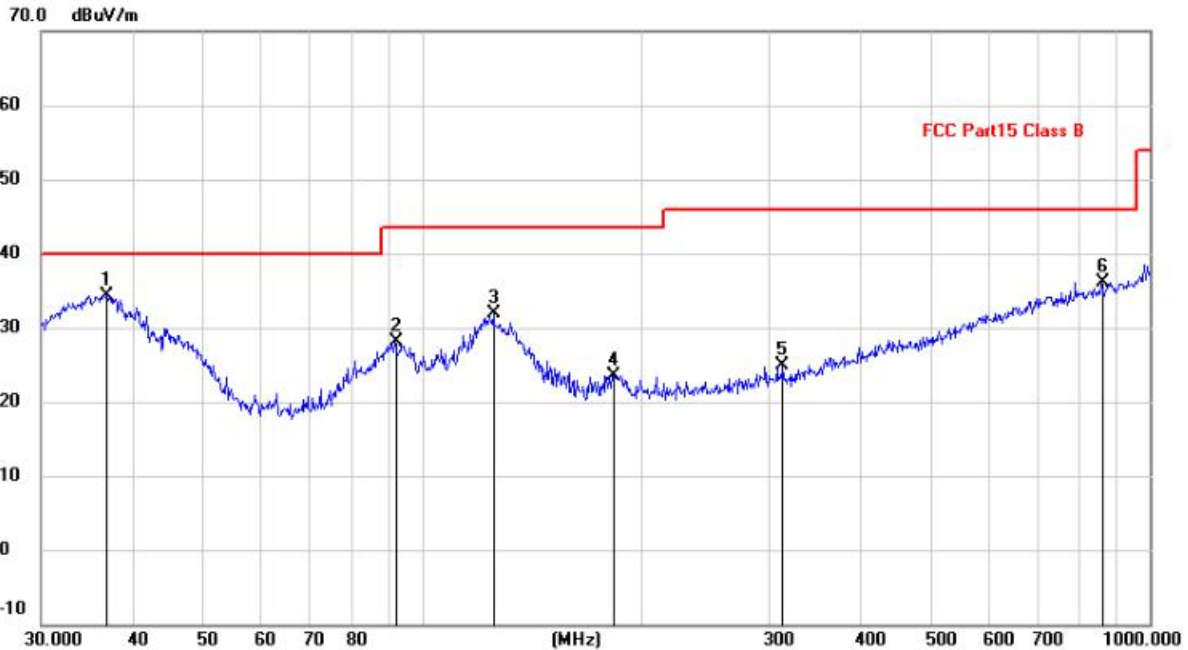

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	36.0007	15.79	23.41	39.20	40.00	-0.80	QP			
2		91.4949	20.00	19.74	39.74	43.50	-3.76	peak			
3		121.5486	13.12	22.74	35.86	43.50	-7.64	peak			
4		300.3672	1.78	23.79	25.57	46.00	-20.43	peak			
5		511.8352	0.16	29.29	29.45	46.00	-16.55	peak			
6		726.8052	2.64	33.15	35.79	46.00	-10.21	peak			



APPENDIX 2 - PHOTOS OF EUT









APPENDIX 3 - TEST PHOTOS



*****END OF THE REPORT*****